


NOTES:

- A. REFER TO INSTALLATION INSTRUCTIONS AND PRODUCT GUIDES AT WWW.COLORKINETICS.COM FOR ALL COLOR KINETICS PRODUCTS INCLUDED IN THIS DIAGRAM.
- B. CONSULT PRODUCT GUIDE OR THE CONFIGURATION CALCULATOR FOR MAXIMUM FIXTURE QUANTITIES FOR THIS SYSTEM.
- C. TOTAL CABLE LENGTH OUT OF A TYPICAL DATA ENABLER PRO CANNOT EXCEED 400' MAX. ANY SINGLE RUN OF CABLE FROM THE LAST/FURTHEST FIXTURE IN A RUN BACK TO THE DATA ENABLER PRO CANNOT EXCEED 175'.
- D. SURGE PROTECTION SHOULD BE CONSIDERED FOR ALL COLOR KINETICS SYSTEMS.
- E. ALL CONTROL EQUIPMENT SHOULD BE LOCATED INDOORS OR OUTDOOR RATED ENCLOSURE (BY OTHERS). REFER TO PRODUCT DATA SHEETS FOR ENVIRONMENTAL PROTECTIONS/IP RATINGS.
- F. THIS IS A RECOMMENDED SYSTEM CONFIGURATION AND THE ACTUAL INSTALLATION MAY VARY IN FIELD. THIS TYPICAL RISER DIAGRAM SHALL NOT BE USED FOR CONSTRUCTION.

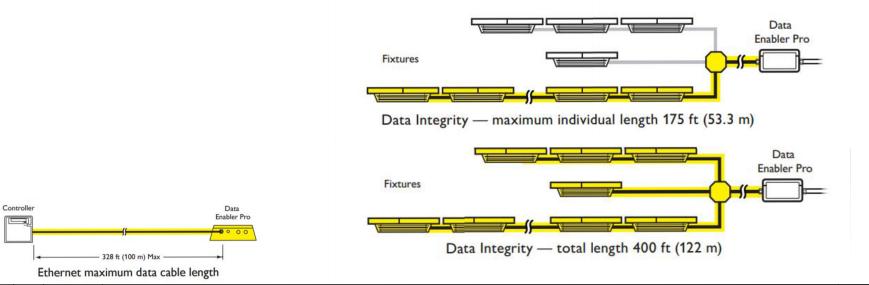

REV	REVISION DESCRIPTION	BY DATE	CK	NATO	DARD WIRING DIAGRA		GRAZE
			CIT STAINDAIND WITHING DIAGRAMS			DATA ENABLER PRO	
						COLORDIAL	
			Signify		THIS DRAWING IS THE PROPERTY OF SIGNIFY AND CONTAINS PROPRIETARY INFORMATION. THIS DRAWING SHALL NOT BE REPRODUCED, COPIED, OR USED WITHOUT PRIOR EXPRESSED WRITTEN PERMISSION. (C) 2023 SIGNIFY HOLDING - AI Rights Reserved.	1'-0" = 1'-0"	_
			<u> </u>	1 Van de Graaff Drive	Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is AM 3/13/2024		
			Tel: 800.555.0050	Burlington, MA 01803	disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.	SECTION	GRA0-DEP-CDP-NO