


- A. REFER TO INSTALLATION INSTRUCTIONS AND PRODUCT GUIDES AT WWW.COLORKINETICS.COM FOR ALL COLOR KINETICS PRODUCTS INCLUDED IN THIS DIAGRAM.
- B. CONSULT PRODUCT GUIDE OR THE CONFIGURATION CALCULATOR FOR MAXIMUM FIXTURE QUANTITIES FOR THIS SYSTEM.
- C. TOTAL CABLE LENGTH OUT OF A TYPICAL DATA ENABLER PRO CANNOT EXCEED 400' MAX. ANY SINGLE RUN OF CABLE FROM THE LAST/FURTHEST FIXTURE IN A RUN BACK TO THE DATA ENABLER PRO CANNOT EXCEED 175'.
- D. SURGE PROTECTION SHOULD BE CONSIDERED FOR ALL COLOR KINETICS SYSTEMS.
- E. ALL CONTROL EQUIPMENT SHOULD BE LOCATED INDOORS OR OUTDOOR RATED ENCLOSURE (BY OTHERS). REFER TO PRODUCT DATA SHEETS FOR ENVIRONMENTAL PROTECTIONS/IP RATINGS.

Controller

F. THIS IS A RECOMMENDED SYSTEM CONFIGURATION AND THE ACTUAL INSTALLATION MAY VARY IN FIELD. THIS TYPICAL RISER DIAGRAM SHALL NOT BE USED FOR CONSTRUCTION.

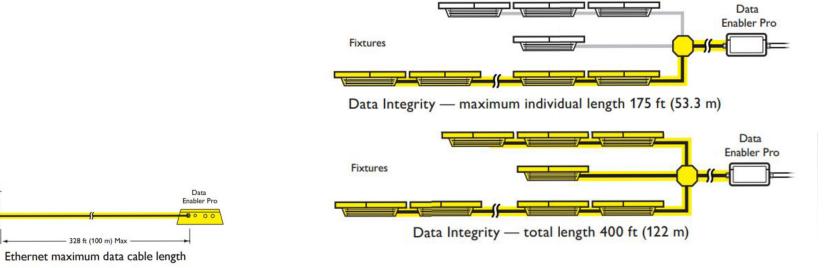

| REV | REVISION DESCRIPTION | BY | DATE | CK STAN | DARD WIRING DIA | GRAMS | GRAZE |
|-----|----------------------|----|------|---|--|--------------|-------------------------------|
| | | | | ONOTAN | | | DATA ENABLER PRO IPLAYER 4 |
| | | | | | | STATUS SCALE | IPLATER 4 |
| | | | | Signify | Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information induded herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. | 1'-0" = 1'- | _ |
| | | | | 1 Van de Graaff Drive Tel: 800.555.0050 Burlington, MA 01803 | | AM 3/13/202 | GRA0-DEP-IP4-NO |