

4 Conductor Flex Dongle

Date: _____
Type: _____
Firm Name: _____
Project: _____

278.8 mm (10.9 in), Black,
Connecting all Flex Compact or
Flex Micro to Leader Cable

LEADER CABLE

A 4 conductor Leader Cable is required to create a complete Flex Leader Cable.



Specifications


Due to continuous improvements and innovations, specifications may change without notice.

Physical


Dimensions	27.0 x 27.0 x 278.8 mm (1.06 x 1.06 x 10.97 in) (Height x Width x Depth)
Weight	0.077 kg (0.17 lb)
Connections	Self-locking, male-female connectors
Cable	4 conductor 1 pair stranded bare copper, 2 core stranded tinned copper
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Wire Gauge Size	Two 16 AWG solid, two 24 AWG stranded
Voltage	75 W maximum at 24 VDC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

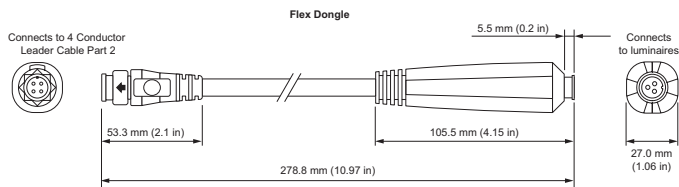

*A Flex Dongle and 4 conductor Leader Cable is required to create a complete Flex Leader Cable.

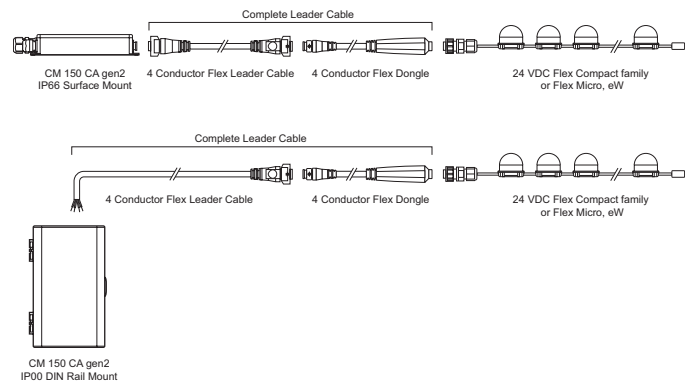

*A Flex Dongle and 4 conductor Leader Cable is required to create a complete Flex Leader Cable..

Part Numbers

Use Item Number when ordering in North America.

Leader Cable

4 Conductor Flex Dongle, 278.8 mm (10.9 in), Black, |
Connecting all Flex Compact or Flex Micro to Leader Cable

Item Number

Item 12NC

108-000082-00

912400137819

A 4 conductor Leader Cable (available below in Associated Part) is required to create a complete Flex Leader Cable.

Associated Part

Flex Leader Cable 30.5 m (100 ft), Black connects to CM 150 CA gen2 IP00

108-000080-12

912400137820

Flex Leader Cable 30.5 m (100 ft), Black connects to CM 150 CA gen2 IP66

108-000082-12

912400137821



© 2022 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com