

4 Conductor Flex Leader Cable

Date: _____
Type: _____
Firm Name: _____
Project: _____

30.5 m (100 ft), Black, Connects
CM 150 CA gen2 IP00 to Flex
Dongle

LEADER CABLE

4 conductor Flex Dongle is required to create a complete Flex Leader Cable.



Specifications



Due to continuous improvements and innovations, specifications may change without notice.

Physical

Dimensions	25.0 mm x 25.0 mm x 30.48 m (0.98 in x 0.98 in x 100.0 ft) (Height x Width x Depth)
Weight	2.45 kg (5.4 lb)
Connections	Self-locking, male-female connectors and flying leads
Cable	4 conductor 1 pair stranded bare copper, 2 core stranded tinned copper
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Wire Gauge Size	Two 16 AWG solid, two 24 AWG stranded
Voltage	75 W maximum at 24 VDC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

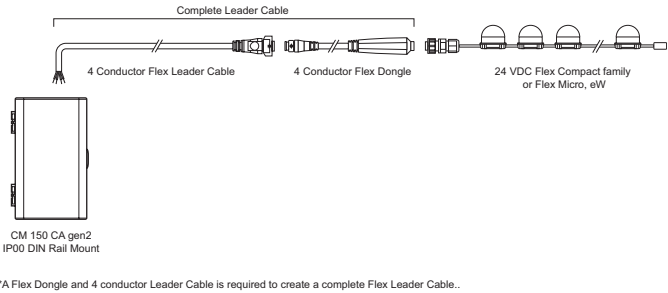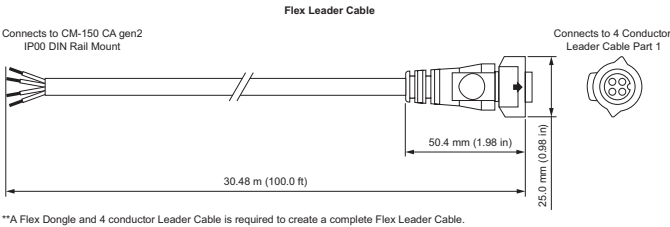

Part Numbers

Use Item Number when ordering in North America.

Leader Cable	Item Number	Item 12NC
4 Conductor Flex Leader Cable, 30.5 m (100 ft), Black, Connects CM 150 CA gen2 IP00 to Flex Dongle	108-000080-12	912400137820
4 conductor Flex Dongle (available below in Associated Part) is required to create a complete Flex Leader Cable.		
Associated Part		
Flex Dongle 278.8 mm (10.9 in), Black	108-000082-00	912400137819

