

4 Conductor Flex Leader Cable

Date: _____
Type: _____
Firm Name: _____
Project: _____

30.5 m (100 ft), Black, Connects
CM 150 CA gen2 IP66 to Flex
Dongle

LEADER CABLE

4 conductor Flex Dongle is required to create a complete Flex Leader Cable.



Specifications


Due to continuous improvements and innovations, specifications may change without notice.

Physical


Dimensions	25.0 mm x 25.0 mm x 30.48 m (0.98 in x 0.98 in x 100.0 ft) (Height x Width x Depth)
Weight	2.96 kg (6.5 lb)
Connections	Self-locking, male-female connectors
Cable	4 conductor 1 pair stranded bare copper, 2 core stranded tinned copper
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Wire Gauge Size	Two 16 AWG solid, two 24 AWG stranded
Voltage	75 W maximum at 24 VDC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

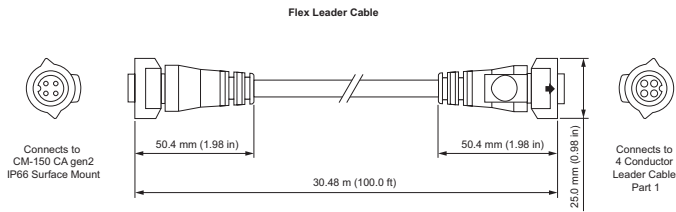

*A Flex Dongle and 4 conductor Leader Cable is required to create a complete Flex Leader Cable.



Part Numbers

Use Item Number when ordering in North America.

Leader Cable

	Item Number	Item 12NC
4 Conductor Flex Leader Cable, 30.5 m (100 ft), Black, Connects CM 150 CA gen2 IP66 to Flex Dongle	108-000082-12	912400137821
<i>4 conductor Flex Dongle (available below in Associated Part) is required to create a complete Flex Leader Cable.</i>		

Associated Part

Flex Dongle 278.8 mm (10.9 in), Black	108-000082-00	912400137819
---------------------------------------	---------------	--------------



© 2022 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics
www.colorkinetics.com