

# 4 Conductor Flex Leader Cable

Date:

Type:

Firm Name:

Project:

15.2 m (50 ft) w/ watertight connectors

For use with CM-150 CA gen2, Surface Mount

4 Conductor Flex Leader Cable, 15.2 m (50 ft) w/ watertight connectors, connecting all Flex Compact or Flex Micro luminaires to CM-150 CA gen2, Surface Mount



## Specifications


Due to continuous improvements and innovations, specifications may change without notice.

### Physical

Dimensions (Height x Width x Depth)	15000 mm (600 in)
Weight	1.0 kg (2.2 lb)
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

### Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

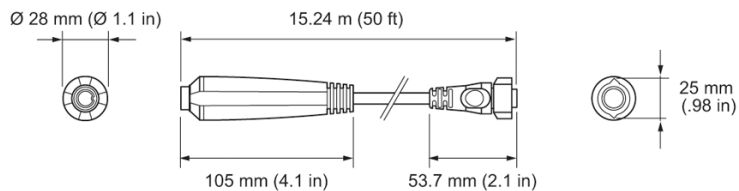

## Part Numbers

Use Item Number when ordering in North America.

Leader Cable	Item Number	Item 12NC
4 Conductor Flex Leader Cable, 15.2 m (50 ft) w/ watertight connectors Connecting all Flex Compact or Flex Micro to CM-150 CA gen2, Surface Mount	108-000082-01	912400135910



© 2022 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics