

4 Conductor Flex Leader Cable

Date:

Type:

Firm Name:

Project:

15.2 m (50 ft) w/ flying leads

For use with CM-150 CA gen2, DIN Rail Mount

4 Conductor Flex Leader Cable, 15.2 m (50 ft) w/ flying leads, connecting all Flex Compact or Flex Micro luminaires to CM-150 CA gen2, DIN Rail Mount



Specifications


Due to continuous improvements and innovations, specifications may change without notice.

Physical

Dimensions (Height x Width x Depth)	15000 mm (600 in)
Weight	1.0 kg (2.2 lb)
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

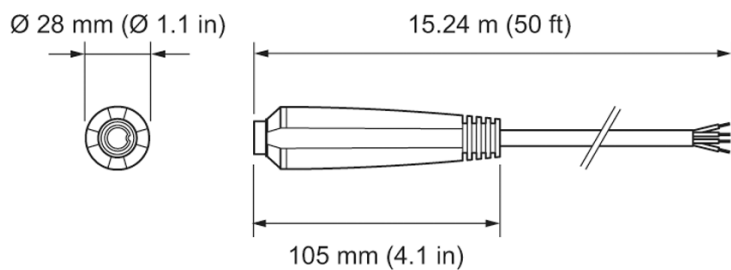

Part Numbers

Use Item Number when ordering in North America.

Leader Cable

4 Conductor Flex Leader Cable, 15.2 m (50 ft) w/ flying leads
Connecting all Flex Compact or Flex Micro luminaires to CM-150 CA gen2, DIN Rail Mount

Item Number

108-000080-01

Item 12NC

912400135907



© 2022 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics

07/12/2022