

3 Conductor Flex Compact Pro Leader Cable

Date: _____
Type: _____
Firm Name: _____
Project: _____

15.2 m (50 ft) w/ flying leads

For use with PDS-80 CK2 24V or CM-160 CK2 24V

3 Conductor Flex Leader Cable, 15.2 m (50 ft) w/ flying leads, connecting Flex Compact Pro to PDS-80 CK2, 24V or CM-160 CK2 24V



Specifications

Due to continuous improvements and innovations, specifications may change without notice.


Physical

Dimensions (Height x Width x Depth)	15.24 m (50 ft)
Weight	1.4 kg (3.1 lb)
Connections	Self-locking, male-female connector, flying leads
Cable	Three conductor, stranded tinned copper
Wire Gauge Size	Three 16 AWG
Outer Cable Insulation	Polyvinyl Chloride
Inner Wire Insulation	PCV, PP
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL, CE

Dimensions

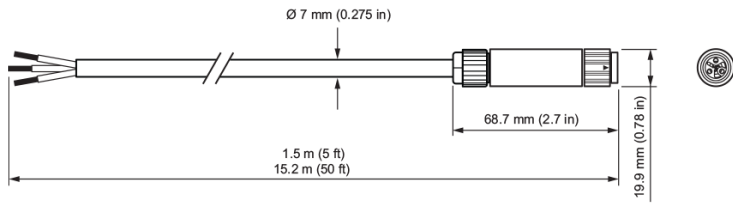

Part Numbers

Jumper Cable

3 Conductor Flex Compact Pro Leader Cable, 15.2 m (50 ft) w/ flying leads
ZGC500 LEADER 50FT 3-WIRE FLY LD

Item Number

608-000082-04

Item 12NC

912400138113



© 2023 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics

03/05/2026